# Decomposing Chinese Characters: LaTeX Typesetting with `zitex`

Wen G. Gong
wen.gong.research@gmail.com

**Abstract**

Chinese characters are built from smaller components, and the arrangement of those components (side by side, stacked, enclosing) carries information that running text cannot show. Writers draw such decompositions by hand, so the figures are slow to make, inconsistent, and detached from the data behind them. We present `zitex`, an extension for XeLaTeX that makes the figure a function of the data. A character is a short entry giving its shape and the position of each part in the eleven-position Zi-Matrix notation. A Python program validates the data and writes a self-contained snippet per character and view: a one-line formula, a typeset equation with pinyin and glosses, a nested-box matrix, or a tree. A package of about sixty lines only includes those snippets. We describe the notation, the design, the handling of fonts and of the source database, and the limits of the present version.

## 1 Introduction

A Chinese character can be read as the product of a reaction in which its parts go in and the character comes out, for example 亻 + 弗 → **佛** (fó, Buddha). This view is used to teach characters, to study how the writing system is organised, and to analyse its structure computationally [1]. Papers on these topics need figures of decompositions, and today they are drawn by hand in a graphics program or in TikZ. A hand-drawn figure is slow to produce, differs from its neighbours, and must be redrawn when the underlying analysis changes.

This paper describes `zitex`, which typesets decompositions directly from data. Its aims are: (i) a figure is generated from a record, so that revising the record revises the figure; (ii) the notation records *where* each part sits, which a flat sequence of components does not; (iii) the LaTeX side stays small, and the data and layout logic live in a program that can be tested; and (iv) the source database is never modified.

## 2 Notation

A character is described level by level. At each level the parts have positions from a fixed set of eleven codes.

The *pattern* of a level is its position codes in reading order, such as `L-M` for 佛 or `LU-RU-M-LD-RD` for 器. A pattern determines the matching Unicode ideographic description operator where one exists: for instance `L-M` and `L-R` map to the left–right operator, and the enclosing patterns `Mo-D`, `Mo-U`, `Mo-R` and `Mo-M` map to the surrounding operators. Some arrangements have no single operator, for example four mouths around a dog in 器. For these `zitex` adds a few operators (such as ∴ ∵ ⁝ ⋮) and a general form that names the pattern. A *radical rule* resolves the ambiguity of two-part levels: a Kangxi radical is peripheral, so the radical is placed at `L` and the other part at `M`, as in 佛 (亻 and

| Code | Region |
|---|---|
| `L`, `R`, `U`, `D` | left, right, up, down |
| `LU`, `LD`, `RU`, `RD` | the four corners |
| `M` | the centre of gravity of the level |
| `Mi`, `Mo` | inside and outside (enclosing) |

**Table 1:** The Zi-Matrix position codes, introduced in [1].

弗). Positions are stored on every level, so a part that is itself decomposed (澡 inside 藻) carries its own pattern.

## 3 Design

Python does the parsing and layout, and LaTeX does the typesetting (Figure 1). `zitex extract` selects characters from a database and writes `chars.yaml`, `lexicon.yaml`, a `main.tex`, and every snippet the document asks for. The only interface between the two halves is the file name of a snippet, `<char>-<style>[-<lang>][@reading].tex`, and the package looks the file up and inputs it. A missing file gives a warning and a red mark, so a long build is not stopped.





**Figure 1:** The workflow. Python writes one self-contained snippet per character and style, and XeLaTeX includes them.

**Views.** The equation view uses only `\text`, `\overset`, `\underbrace` and `\xrightarrow`, so it also works in MathJax. The matrix and the tree are TikZ pictures with coordinates computed in Python, which allows patterns of any size without a TikZ tree library.

**Readings.** Which part carries the meaning and which the sound is an interpretation. A character may store several named *readings*, selected per call with `reading=`, so that two interpretations can be set in one document without duplicating the data.

**Validation.** `zitex check` reports unknown positions, patterns an operator does not allow, overlapping regions, and a radical placed at the centre. These are warnings and not errors, because the data being typeset is itself under review.

**Fonts.** A component is resolved in a fixed order: an explicit override, the primary font, fallback fonts, an image, and finally a boxed code point with a warning. Components that have no Unicode code point can therefore be set like any other.


**Data.** Decompositions come from YAML files or from a SQLite database. The database is opened read only. `zitex` derives its own tables from it, and a hand revision is stored together with what it replaced, so that it can be reverted and is re-applied when the tables are rebuilt. A Streamlit application reviews and revises decompositions, and generates a PDF for a list of characters.

## 4 Example

The commands below make a self-contained folder and typeset three characters.

```
zitex setup   -o work/
zitex extract -c 器,藻,佛 -o work/
cd work && xelatex main.tex
```

The document asks for views with `\zimath{藻}`, `\zimatrix{器}`, `\zitree{藻}` and `\ziformula{佛}`. They give:



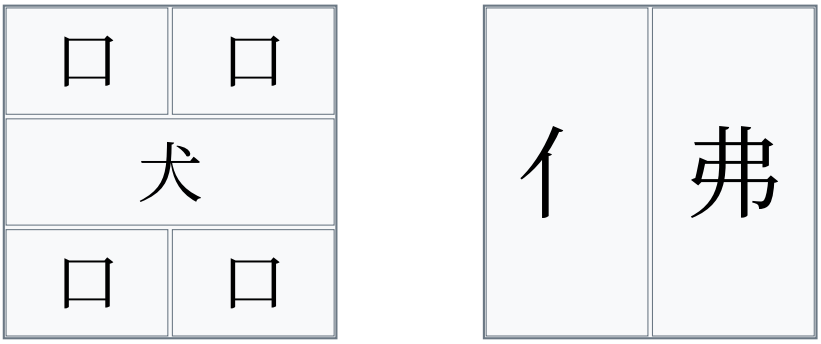




**Figure 2:** Zi-Matrices of 器 (four 口 at the corners and 犬 in the centre) and 佛 (亻 and 弗).

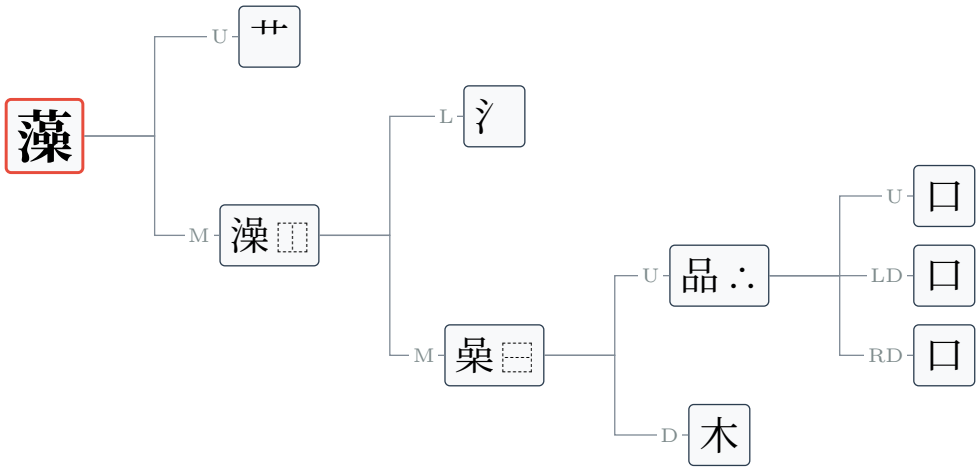



**Figure 3:** The decomposition tree of 藻. Leaves are parts that are not decomposed further.

The matrix keeps the geometry (Figure 2), and the tree shows the depth (Figure 3): 藻 has four levels, because 澡 and 喿 are decomposed too. Inline, `\ziformula{器}` gives 口 + 口 + 犬 + 口 + 口 → **器** (qì, device).

## 5 Related work and limitations

The Unicode Standard defines ideographic description characters, and community projects distribute ideographic description sequences for large character sets [2]. These record a character as a string and do not give positions or figures. `zitex` reads this form and adds positions per level. Figures are produced with TikZ [4], and Chinese text with `xeCJK` [5], which `zitex` builds on. We did not survey other tools for drawing character decompositions, and a comparison is future work.

The present version has these limits. It needs XeLaTeX, and has not been tried with other engines. Snippet file names contain the character itself, which works on Linux and macOS and has not been tried on Windows. The decomposition database used for development is a first iteration under review: 223 rows of about 6,200 cannot be converted yet, and warnings remain on some characters. Glosses are first senses from a dictionary and are not curated. We make no claim about the etymology of any character: the figures show the data.

## 6 Availability

`zitex` is released under the MIT licence at `https://github.com/digital-duck/zinets-latex`. The English glosses are derived from CC-CEDICT (CC BY-SA 4.0) [3] and are attributed in the data.

## Acknowledgements

This work began as a conversation with Google Gemini, and the building, testing and writing phases were assisted by Claude Code of Anthropic. The character decompositions, solution design, and result validation are the author' s.

## References

[1] Wen G. Gong. *A New Exploration into Chinese Characters: from Simplification to Deeper Understanding*. arXiv:2502.19428, 2025.

[2] *cjkvi-ids: Ideographic Description Sequences for CJKV characters*. `https://github.com/cjkvi/cjkvi-ids`.

[3] *CC-CEDICT: a Chinese-English dictionary*. `https://cc-cedict.org`.

[4] Till Tantau. *The TikZ and PGF Packages*. CTAN, `https://ctan.org/pkg/pgf`.

[5] *The xeCJK package*. CTAN, `https://ctan.org/pkg/xecjk`.